

511 824
Rec'd PCT/PTO 01 APR 2005

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
6 November 2003 (06.11.2003)

PCT


(10) International Publication Number
WO 03/092135 A1

- (51) International Patent Classification⁷: H02G 1/08
- (21) International Application Number: PCT/GB03/00667
- (22) International Filing Date: 14 February 2003 (14.02.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
0209305.2 24 April 2002 (24.04.2002) GB
- (71) Applicant (for all designated States except US): INTERNATIONAL BUSINESS MACHINES CORPORATION [US/US]; New Orchard Road, Armonk, NY 10504 (US).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): HARLEY, Ian [GB/GB]; 30 Churchward Gardens, Hedge End, Southampton, Hampshire SO30 2XP (GB).
- (74) Agent: MOSS, Robert, Douglas; IBM United Kingdom Limited, Intellectual Property Law, Hursley Park, Winchester, Hampshire SO21 2JN (GB).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: CABLE INSTALLATION

(57) Abstract: The invention relates to a device for gripping a cable (100), comprising an elongated housing for slidably receiving the cable (100) axially thereof. The housing is configured to permit an end of the cable to leave the housing and be received back by the housing to form a loop (180). The device further includes means for securing at least the part of the cable received back by the housing.

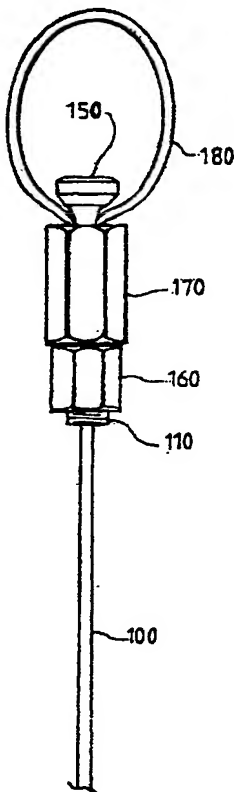

WO 03/092135 A1



Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

CABLE INSTALLATIONField of the invention

5 The present invention relates to the installation of cabling.

Background of the invention

10 Twisted pair copper cabling has traditionally been used within buildings to carry voice and data to end-user equipment such as computers, telephones and the like and typically hundreds of metres of cabling has to be run above ceiling or under floor to reach that user equipment.

15 Figure 1 shows the components involved in installing such cabling according to the prior art. Installers typically pull such cables in from a drum 10 containing 500 metres of cable 20. The end of the cable 20 is placed in a pulling sock 30 made of a steel lattice and as the cable is pulled this lattice tightens around the length of cable it surrounds to securely grip it.

20 Potential damage to the cables during the installation process caused by over stretching of the twisted pair conductors inside the insulating sheath is a big problem. Over stretching causes the distance between the twisted pairs to be reduced giving rise to an increase in cross-talk and reducing the effectiveness of the cables. Thus a pulling fuse 40 or similar device (such as the magnetic linkage disclosed in copending patent application GB0118861.4) is used to prevent too great a force being applied to the cable during the installation process (the linkage is adapted to break when a predetermined force is applied and has to be reset before installation can continue). Attached to the other end of the pulling fuse via the fuse's quick release loop is a handle 50 used by the installers to manually pull the cable into position.

35 The onset of Cat 6 / 7 standards has placed demands on manufacturers for even greater performance and bandwidth. Cabling such as Shielded Foiled Twisted Pair (SFTP) has been developed to meet these increased demands. With such cabling, each twisted pair conductor is surrounded by a layer of aluminium foil. All the pairs are then covered by a further layer of foil and then a braided shield. This new configuration permits a higher transfer rate and is even more highly dependent upon the precise positioning of the twisted pair conductors within the cabling sheath.

40

The use of a pulling sock is not suitable for gripping these new cables for a number of reasons. Current pulling socks are designed for much thicker cables and it is physically difficult to make them small enough to grip the newer type of cable securely. Further, the length of the cable gripped by the pulling sock has to be thrown away. This is because, the gripping action of the sock is likely to have displaced the conductors within the cabling sheath and thus this part of the cable cannot be relied upon to work properly.

Further, the pulling sock is required to be relatively long in order to achieve a sufficient clamping force on the cable. This is because the sock's steel lattice only tightens around the cable as it is pulled. If the sock was any shorter, the cable might well have been pulled out of the sock before the steel lattice had a chance to grip it properly. The length of the pulling sock means that a large amount of cable is wasted.

WO 00/60714 discloses a device for connecting a wire or cable enabling the traction thereof. This device comprises a ring provided with one or several longitudinal grooves, an end piece provided with the same number of longitudinal grooves as in the ring and designed to fit inside said ring, whereby the longitudinal grooves in the end piece and the ring, when they are located opposite each other, form at least one housing that is adapted to the section of each wire, means (preferably by screwing) that lock the end piece inside the ring in an angular locking position where the corresponding grooves are offset in relation to the others, and protruding elements (threads on the inner side of the ring for example) that are adapted to grasp each wire of the cable in said locking position. This device can be used for drawing wires or electric cables in ducts or casings.

Summary of the Invention

Accordingly, the invention provides a device for gripping a cable, comprising an elongated housing for slidably receiving the cable axially thereof, the housing being configured to permit an end of the cable to leave the housing and be received back by the housing to form a loop, the device further including means for securing at least the part of the cable received back by the housing.

The device is intended to be used in place of the prior art pulling sock shown in figure 1. The prior art pulling sock has a loop which permits it to be attached to a pulling fuse or similar device. The device

of WO 00/60714 also has a cavity in the device's head which permits its fixing with a means of traction. The gripping device of the present invention is not supplied with a loop or other means of traction. Instead the cable itself is used to form a loop by which the cable can be attached to the pulling fuse or similar device. (Of course, the gripping device could be attached directly to a handle or a pulling rope, but this would risk the installers inadvertently over stretching the cable and thereby damaging it).

Using the cable loop as an attachment means is particularly advantageous. This reduces the number of parts that need to be supplied with the device and therefore reduces manufacturing costs.

A further aspect of the invention will now be described. It is important when multiple cables are pulled that a symmetrical pulling force is exerted and that the tension on each cable is substantially identical. This is because, as previously mentioned, the cables are likely to be damaged if over stretched. Therefore a pulling fuse or similar device is used which will break if a predetermined force is applied during the pulling process and thus prevent the application of an excessive force. In order to ensure that the device severs at the correct point in time, the force applied is required to be a symmetrical one.

In a further aspect, the invention provides a device for pulling a plurality of cables, comprising a base and means for attaching each of the plurality of cables to the base, the attachment means comprising a first central attachment device and an even number of further attachment devices symmetrically surrounding the central device.

Cable has a memory and can become twisted during the installation process. This can slow the process and can potentially lead to damage to the cable due to displacement of the internal conductors. Preferably, therefore, each attachment means is freely rotatable about the base and thus can move with the cable. Preferably each attachment means comprises a quick-release loop to make their use as easy as possible.

In a yet further aspect, the invention provides a device for pulling substantially as herein before described with reference to figures 3a, 3b and 3c.

Brief Description of the Drawings

A preferred embodiment of the present invention will now be described, by way of example only, and with reference to the following drawings:

Figure 1 shows the components involved in installing cabling according to the prior art and as discussed hereinbefore;

Figures 2a and 2b show a cable gripper in accordance with a preferred embodiment of the present invention;

Figure 2c is a longitudinal cross-section of the cable gripper prior to the second lock piece being tightened against the first lock piece (not to scale).

Figure 2d is a longitudinal cross-section of the cable gripper after tightening the second lock piece (not to scale);

Figures 3a, 3b and 3c show a device for pulling multiple cables in accordance with a preferred embodiment of the present invention.

Detailed Description

Referring to figures 2a, 2b, 2c and 2d, a housing comprises a hollow tubular body 105 for receiving a cable 100 axially within its central bore 105A. A lower portion 110 of the body is threaded. An upper portion 120 has a head 150 with an angled under surface 150A and also a transverse aperture 125 (see figure 2c, 2d) which spans the full width of the body 105. The aperture 125 has an exit 130 through which the free end of the cable 100, which enters the body 105 at its lower end remote from the head 150 and travels up the centre of the body, can be pulled by an installer (as shown in the figure 2a). The aperture 125 extends to an entrance 140 to permit the free end of the cable to be fed back into the body 105 to form a loop 180. The ceiling 165 (figures 2c, 2d) of the aperture 125 is preferably slanted upwardly to the exit 130 so as to guide the cable out through the exit.

A first lock piece 170 slides axially over the tubular body 105 to make contact with the loop at the entrance 140 and exit 130 of the aperture 125 to force the cable against the angled surface 150A of the head 150 at these points. A second lock piece 160 is threaded onto the

cylindrical body and can be tightened up against the first lock piece 170 to clamp the cable loop in place.

A helical spring 185 as shown in figure 2c and 2d is under compression between the first and second lock pieces so that the first lock piece 170 is biased towards the head 150. Thus, force has to be applied to this piece 170 in a direction away from the head in order to be able to draw the cable out of the exit 130 and to place the free end of the cable into the entrance 140 of aperture 125 to form the loop 180. The spring sits on a tubular extension 195 of the second lock piece 160. Once the piece 170 is released the spring urges the lock piece 170 back towards the head in order to temporarily hold the cable in place (as shown in figure 2c) until the second lock piece 160 can be tightened on threads 190 to secure loop 180 (see figure 2d). This effect of the spring means that tightening of the second lock piece is a simple one-handed job. Further the spring ensures that the resting position of the first lock piece is always up against the head and so inhibits dirt from entering the housing and thereby hampering operation of the parts.

In an alternative embodiment, not shown, the aperture 125 may not extend fully across the width of the body 105, but only from the exit 130 to the hollow central bore 105A of the body 105. In this case a recess is formed in the side of the body opposite the exit 130, such recess being located where the entrance 140 is in the illustrated embodiment. In use, the free end of the cable 100 is tucked into this recess and clamped by the first lock piece 170 as before.

In this further embodiment, too, the surface 150A and/or the top end of the lock piece 170 is relieved in the vicinity of the exit 130 so that the cable 100 is only clamped at the free end tucked into the recess. This allows an installer to pull on the cable 100 and for the cable loop 180 to tighten around the device to which it is attached. This variation can also be used where the aperture 125 does extend across the full width of the body 105; in that case the cable is clamped only at the entrance 140.

The disclosed cable gripper provides a simple but effective way of attaching a cable to a pulling fuse or similar device. Unlike the pulling sock it can be dimensioned so as to work with the newer type of cables. Further, much less cable is damaged than with this prior art solution. Only the part of the cable (at least initially) used to form the loop need be thrown away. This is as opposed to the whole length of cable inside

the prior art sock. This is due to the way in which the cable is secured which allows the device to be far shorter than the pulling sock, whilst still achieving enough of a clamping force on the cable. The pulling sock is necessarily of a far greater length in order to securely grip the cable. This is because the sock's steel lattice only tightens around the cable as it is pulled. If the sock was any shorter, the cable might well have been pulled out of the sock before the steel lattice had a chance to grip it properly.

Further the cable gripper of the present invention is particularly advantageous because the attachment means is the cable itself (i.e. loop 180). This reduces the number of parts that have to be supplied and so lessens manufacturing costs.

The device can also be made of a lightweight material such as aluminium. Prior art pulling socks are much bigger and therefore heavier. Installers will often be pulling in four cables at a time, each gripped by a pulling sock. The combined weight of the four pulling socks, adds to the force that needs to be exerted to pull the cables into position. However if too great a force is exerted then the cables will be over stretched and thus their internal conductors damaged. As discussed above a pulling fuse or similar device is used which will break when a predetermined force is applied by installers and has to be reset before the installation can continue. Since the predetermined breaking force is typically low when pulling in the more fragile cables (e.g. 4 x 4 pair cables pulled in by hand = 125N), the lighter the cable gripping device is, the better. This is because a heavier device will encourage installers to exert more force during the installation process and thus they are more likely to have to reset the pulling fuse or similar device.

When pulling in multiple cables at once, it is also important that the pulling force exerted is symmetrical. Otherwise it is difficult to ensure that the pulling fuse or similar device will break at the correct predetermined force in order to avoid over stretching the cable. Figures 3a, 3b and 3c show a device for achieving such a symmetrical pulling force in accordance with a preferred embodiment of the present invention.

The device has an octagonal base 200. Four barrels 210, 220, 230 and 240 are placed symmetrically on the base 200 around a centre barrel 250. Each barrel is attached to the base by a swivel bearing 260 which permits each barrel to rotate freely about an axis normal to the base. The spacing of the barrels is chosen so as to ensure that they do not

interfere with one another in use. A screw pin 280 is fixed across the diameter of each barrel and provides a point around which to attach a quick release loop 290. The cable loop formed from using the gripper device of the invention is looped over this loop 290 to attach it to the multiple puller device. The underside of the base (as shown in figure 3c) has a single quick release loop 300 attached thereto in register with the centre barrel 250. In use this is attached to the pulling fuse or similar device. (Of course, it may be attached directly to a handle or pulling rope, but this would risk an installer inadvertently damaging the cables by over stretching them.)

The positioning of the number of cables being pulled determines the choice of barrels. For example, an installer pulling four cables should use barrels 210, 220, 230 and 240. On the other hand if only three cables are being pulled, then barrels 210, 250, and 240 or barrels 220, 250 and 230 should be used. Because the barrels can swivel freely, the cable is less likely to the barrels is chosen such that a symmetrical pulling force can be achieved no matter how many cables (up to a maximum of five in this embodiment) are pulled in. In order to be sure of achieving a symmetrical pulling force, become twisted during the installation process. This is important since twists hamper installation and can damage the cable itself.

CLAIMS

1. A device for gripping a cable, comprising an elongated housing for slidably receiving the cable axially thereof, the housing being configured to permit an end of the cable to leave the housing and be received back by the housing to form a loop, the device further including means for securing at least the part of the cable received back by the housing.

2. The device of claim 1, wherein the housing is tubular and the cable passes along a central bore of the tube.

3. The device of claim 2, wherein the housing has an aperture which opens in at least one side of the housing, the cable leaving the housing through such aperture.

4. The device of claim 3, wherein the housing has a recess in the side of the housing opposite the aperture opening, the end of the cable being received in such recess.

5. The device of claim 3, wherein the aperture extends fully across the width of the housing to open in the opposite sides of the housing, the cable leaving the housing through one end of the aperture and being received back by the housing through the other end of the aperture.

6. The device of claim 3, 4 or 5, wherein the ceiling of the aperture is slanted to guide the cable out through the aperture.

7. The device of any preceding claim wherein the housing has a head, and said means for securing the cable loop comprises a first lock piece for temporarily holding the cable loop against the head and a second lock piece for securing the first lock piece against the cable loop.

8. The device of claim 7 further comprising a biasing means for biasing the first lock piece towards the head.

9. A device for pulling a plurality of cables, comprising a base and means for attaching each of the plurality of cables to the base, the attachment means comprising a first central attachment device and an even number of further attachment devices symmetrically surrounding the central device.

10. The device of claim 9, wherein each attachment device is freely rotatable about an axis normal to the base.

11. The device of claim 9 or 10, wherein each attachment device comprises a quick-release loop.

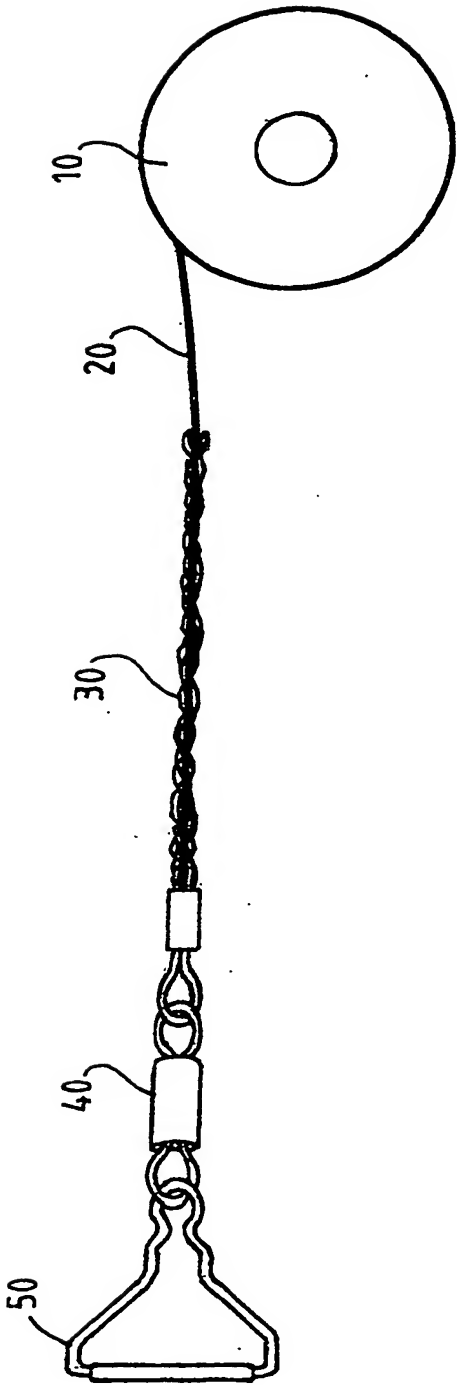


FIG. 1

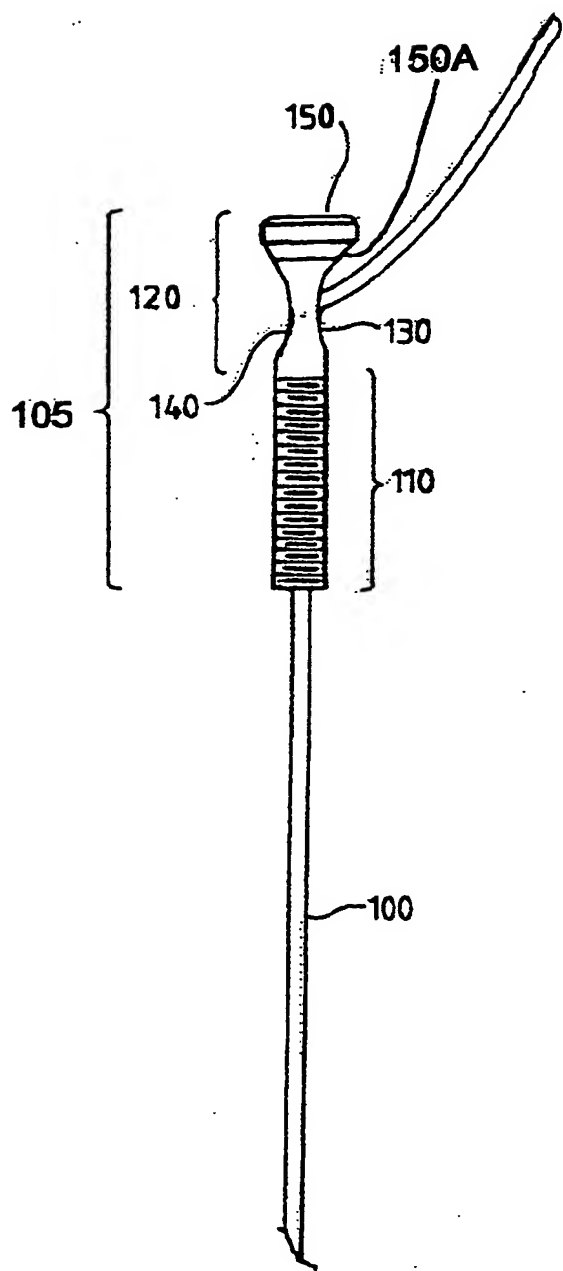


FIG. 2A

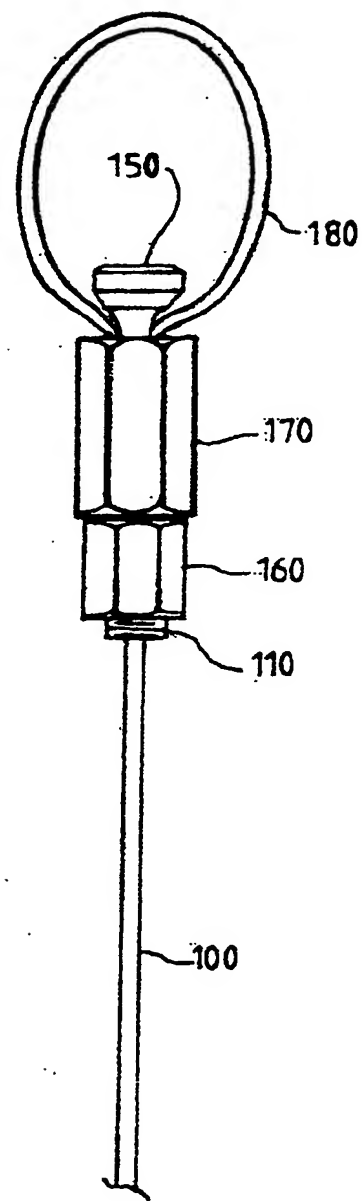


FIG. 2B

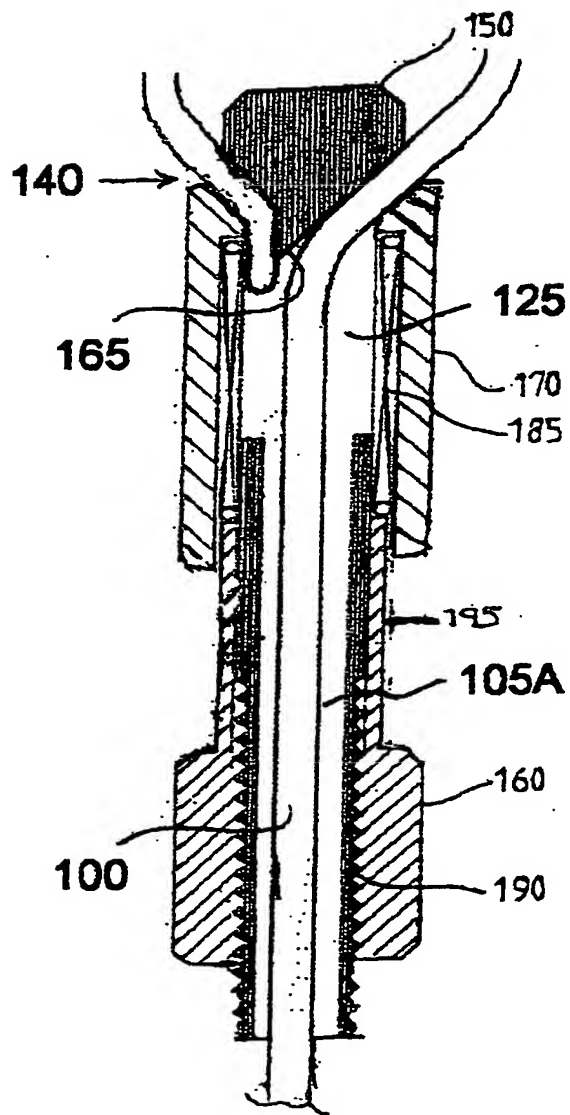


FIG. 2C

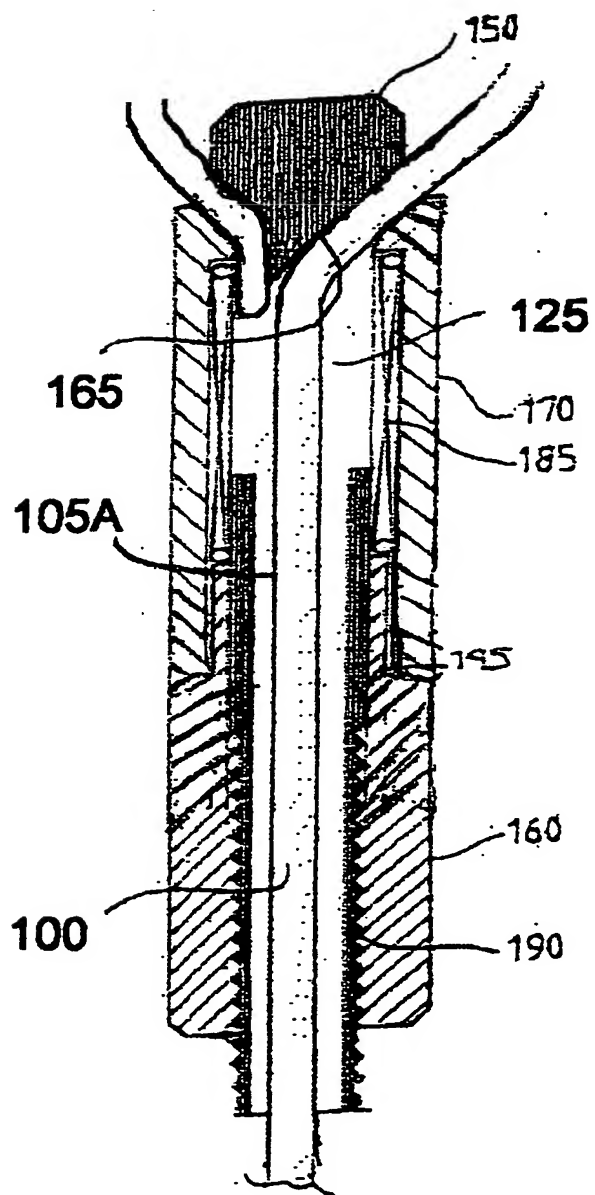


FIG. 2D

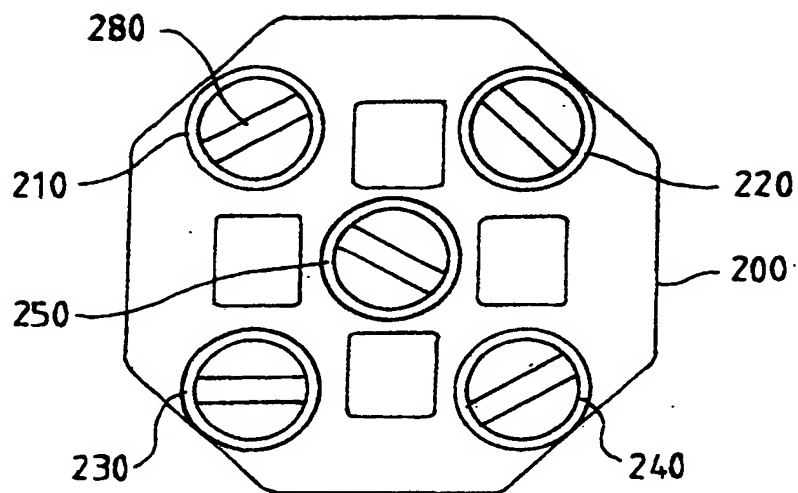


FIG. 3A

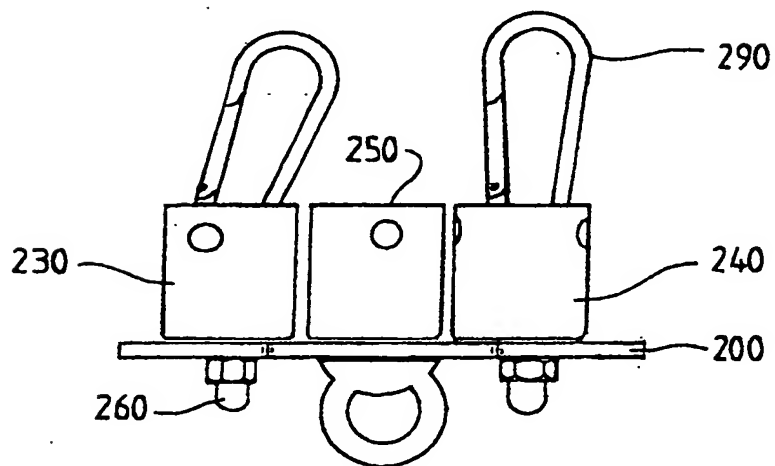


FIG. 3B

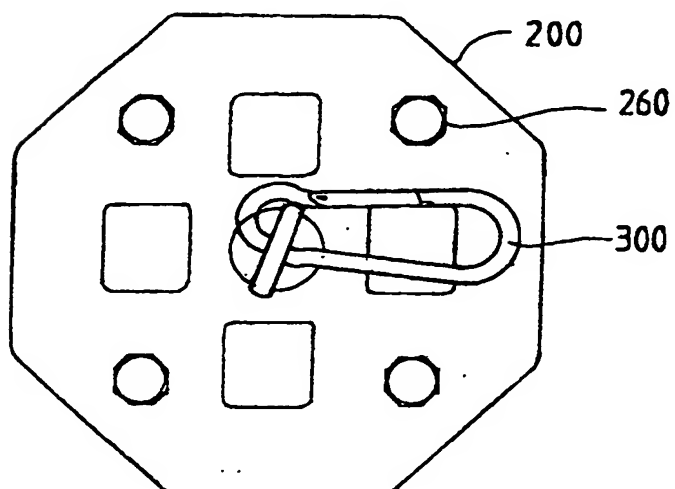


FIG. 3C

INTERNATIONAL SEARCH REPORT

Int ☐ onal Application No

PCT/GB 03/00667

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 H02G1/08

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 H02G

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the International search (name of data base and, where practical, search terms used)

WPI Data, PAJ, EP0-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	DE 42 03 093 A (ANT NACHRICHTENTECH) 5 August 1993 (1993-08-05) column 1, line 28 - line 67; figures 1,2 ---	1-5
X	DE 85 20 355 U (LANCIER) 12 September 1985 (1985-09-12) page 2, last paragraph -page 3, paragraph 2; figures 1,2 ---	9
X	US 3 166 810 A (ENSLEY) 26 January 1965 (1965-01-26) claim 1; figures 1-6 ---	9
P, A	GB 2 378 212 A (IBM) 5 February 2003 (2003-02-05) cited in the application abstract; figure 1 ---	1
-/--		



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the international search

27 May 2003

Date of mailing of the international search report

04/06/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Lomme1, A

INTERNATIONAL SEARCH REPORT

Int l Application No

PCT/GB 03/00667

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 00 60714 A (INST FRANCAIS DU PETROL ;LAVABRE VINCENT (FR); VINCENT LAVABRE MEC) 12 October 2000 (2000-10-12) cited in the application abstract; figures 1-4 -----	1,9

INTERNATIONAL SEARCH REPORT

International application No.
PCT/GB 03/00667

Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☐ Claims Nos.:
because they relate to parts of the International Application that do not comply with the prescribed requirements to such an extent that no meaningful International Search can be carried out, specifically:
3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this International application, as follows:

see additional sheet

1. ☐ As all required additional search fees were timely paid by the applicant, this International Search Report covers all searchable claims.
2. ☒ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this International Search Report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
- ☐ No protest accompanied the payment of additional search fees.

FURTHER INFORMATION CONTINUED FROM PCT/SA/ 210

This International Searching Authority found multiple (groups of) inventions in this international application, as follows:

1. Claims: 1-8

Cable gripping device, comprising an elongated housing configured to form a cable loop.

2. Claims: 9-11

Device for pulling a plurality of cables, comprising a base and cable attachment devices surrounding symmetrically a central attachment device.

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/GB 03/00667

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
DE 4203093	A	05-08-1993	DE 4203093 A1	05-08-1993
DE 8520355	U	12-09-1985	DE 8520355 U1	12-09-1985
US 3166810	A	26-01-1965	NONE	
GB 2378212	A	05-02-2003	WO 03012948 A1	13-02-2003
WO 0060714	A	12-10-2000	FR 2791821 A1	06-10-2000
			AU 3301500 A	23-10-2000
			DE 60000254 D1	14-08-2002
			DE 60000254 T2	21-11-2002
			EP 1084529 A1	21-03-2001
			ES 2179812 T3	01-02-2003
			WO 0060714 A1	12-10-2000
			PT 1084529 T	31-10-2002